


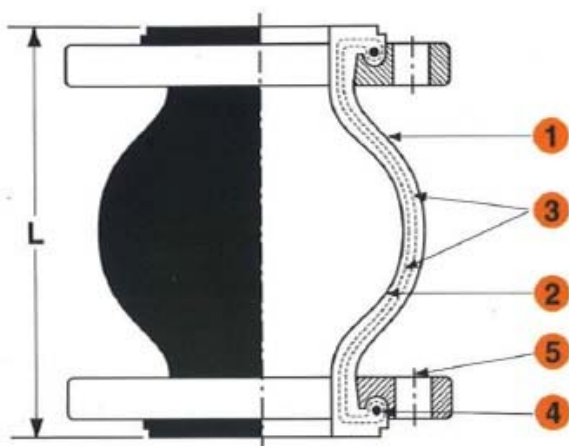

S/NO	PART NAME	MATERIAL
1	Body (Outer Layer)	Special Synthetic Rubber
2	Body (Inner Layer)	Special Synthetic Rubber
3	Reinforcing Fabric	Nylon Fabric
4	Wire	Hard Steel Wire
5	Flange	Mild Steel (Galv'd)
Operating Pressure		: 232 PSI (1.6 MPa)
Working Temperature		: -10 to 80 Deg C
Vacuum Rating		: 700 MM/HG
Applicable Fluids		: Water, Air, Warm Water, Sea Water & Weak Acid
Flanges Standard		: JIS, ANSI, BS & DIN

DIMENSION AND TECHNICAL DATA


Nominal Pipe Size (mm)	Neutral Length (L) (mm)	ALLOWABLE MOVEMENT			
		Axial Compression (mm)	Axial Elongation (mm)	Lateral Deflection ± (mm)	Angular Deflection ± (Deg)
25	93	3	4	6	15
32	93	3	4	6	15
40	93	3	4	6	15
50	99	8	6	8	15
65	108	8	6	8	15
80	116	8	8	8	15
100	129	8	8	12	15
125	142	8	10	12	15
150	156	8	10	12	15
200	177	8	12	18	15
250	206	12	12	18	15
300	217	12	12	18	15
Larger sizes of joint available to order (Refer to next page)					

OPERATING TEMPERATURE AGAINST OPERATING PRESSURE

Operating Temperature (°C)	Normal	50	60	70	80
Max. Operating Pressure (PSI)	232	180	145	110	95

NOTE

- Instruction of Installation is shown on page 9.
- Control rod assemblies consists of control plates incorporating tie bars and full nuts.
- For other kinds of applicable fluids, except the above, to which the rubber joint becomes applicable, please kindly consult your supplier or manufacturer.

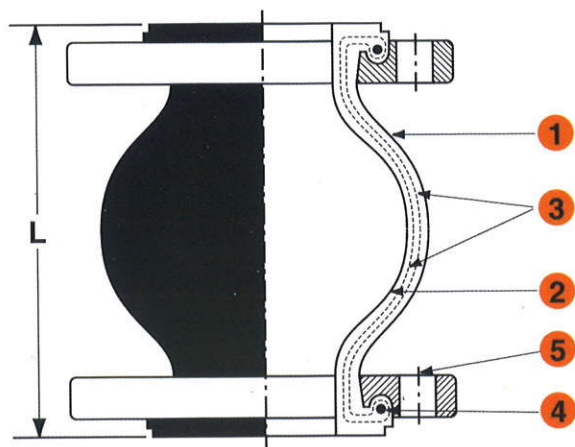

S/NO	PART NAME	MATERIAL
1	Body (Outer Layer)	Special Synthetic Rubber
2	Body (Inner Layer)	Special Synthetic Rubber
3	Reinforcing Fabric	Nylon Fabric
4	Wire	Hard Steel Wire
5	Flange	Mild Steel (Galv'd)
Operating Pressure		: 125 PSI (0.85 MPa)
Working Temperature		: -10 to 80 Deg C
Vacuum Rating		: 700 MM/HG
Applicable Fluids		: Water, Air, Warm Water, Sea Water & Weak Acid
Flanges Standard		: JIS, ANSI, BS & DIN

DIMENSION AND TECHNICAL DATA

Nominal Pipe Size (mm)	Neutral Length (L) (mm)	ALLOWABLE MOVEMENT			
		Axial Compression (mm)	Axial Elongation (mm)	Lateral Deflection ± (mm)	Angular Deflection ± (Deg)
350	266	12	12	18	15
400	266	12	12	18	15
450	200	12	10	15	10
500	200	12	10	15	10
600	250	12	10	15	10

OPERATING TEMPERATURE AGAINST OPERATING PRESSURE

Operating Temperature (°C)	Normal	50	60	70	80
Max. Operating Pressure (PSI)	125	90	70	55	40

NOTE

- Instruction of Installation is shown on page 9.
- Control rod assemblies consists of control plates incorporating tie bars and full nuts.
- For other kinds of applicable fluids, except the above, to which the rubber joint becomes applicable, please kindly consult your supplier or manufacturer.