

917C

PRE-ASSEMBLED
MANIFOLD WITH
FLOW METERS

	SIZE	PRESSURE	CODE	PACKING
	1"x3/4"x3	6bar/87psi	9170010003034C	1/1
	1"x3/4"x4	6bar/87psi	9170010004034C	1/1
	1"x3/4"x5	6bar/87psi	9170010005034C	1/1
	1"x3/4"x6	6bar/87psi	9170010006034C	1/1
	1"x3/4"x7	6bar/87psi	9170010007034C	1/1
	1"x3/4"x8	6bar/87psi	9170010008034C	1/1
	1"x3/4"x9	6bar/87psi	9170010009034C	1/1
	1"x3/4"x10	6bar/87psi	9170010010034C	1/1
	1"x3/4"x11	6bar/87psi	9170010011034C	1/1
	1"x3/4"x12	6bar/87psi	9170010012034C	1/1
	1"x3/4"x13	6bar/87psi	9170010013034C	1/1

TECHNICAL SPECIFICATIONS

Consisting of:

- 1 return manifold in stainless steel AISI 304L with shut-off valves preset for electrothermal actuators
- 1 flow manifold in stainless steel AISI 304L with flow meters
- 2 complete metal brackets.

Available on demand with deeper mounting brackets art. 498ST.

Available size: 1"

Maximum working pressure: 6 bar (10 bar for installation test)

Maximum working temperature: 70°C

Threads: ISO 228 (equivalent to DIN EN ISO 228 and BS EN ISO 228)


Outlets: from 3 to 13, 3/4" Eurokonus

Outlet centre distance: mm.50.

In case of use of electric actuators Art. 891M, it is suggested to use the off-centre by-pass kit Art. 860BY.

ATTENTION: manifolds will be supplied mounted on the brackets;

MATERIALS


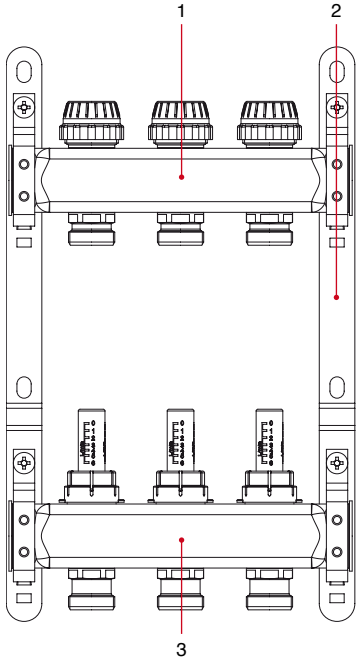


POS.	DESCRIPTION	N.	MATERIAL
1	Single manifold with shut-off valves	1	Stainless steel AISI 304L
2	Mounting brackets	1	Steel P11
3	Single manifold with flow-meters	1	Stainless steel AISI 304L



TEC

OVERALL DIMENSIONS

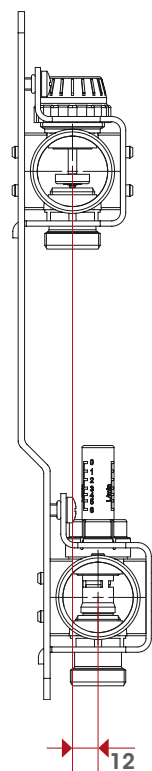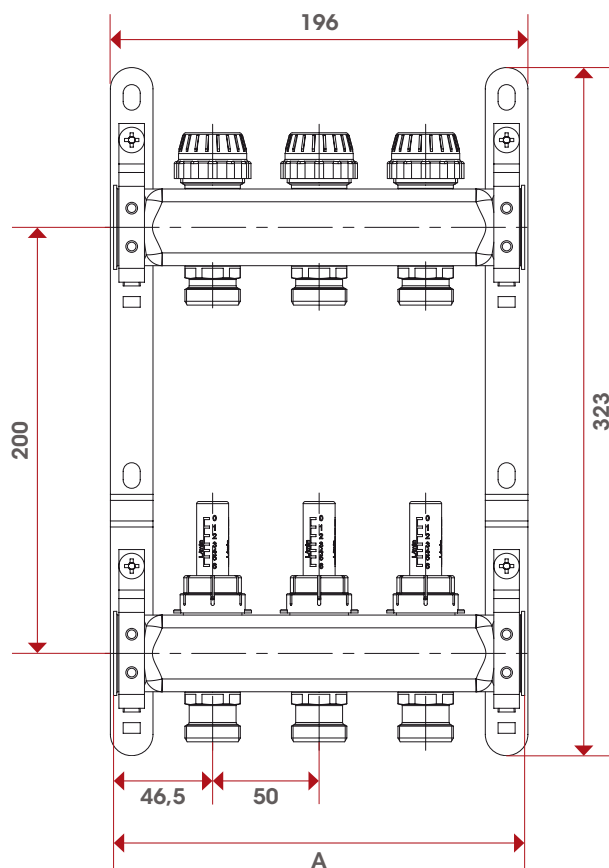

	1" x 3/4"
	A
3	193
4	243
5	293
6	343
7	393
8	443
9	493
10	543
11	593
12	643
13	693

CERTIFICATIONS



TECHNICAL FEATURES